

MACHOS DE MANO

TARAUDS À MAIN / HAND TAPS

2311 HSS DIN 352

BA
BS 93




BS
93

Aceros 400 - 800 N/mm²

Aciers / Steel F

Aplicaciones / Applications

Macho 3° }
Taraud 3° } PVP = €/3
Tap 3° }



Ø x P	Nº	€	L mm	I mm	∇ mm
BA0 (6,00 x 1,00)	3		50	19	4,90
BA1 (5,30 x 0,90)	3		50	19	4,90
BA2 (4,70 x 0,81)	3		50	16	4,90
BA3 (4,10 x 0,73)	3		45	13	3,40
BA4 (3,60 x 0,66)	3		45	13	3,00

Ø x P	Nº	€	L mm	I mm	∇ mm
BA5 (3,20 x 0,59)	3		45	13	3,00
BA6 (2,80 x 0,53)	3		40	11	2,70
BA7 (2,50 x 0,48)	3		40	9	2,10
BA8 (2,20 x 0,43)	3		36	9	2,10

2312 HSS DIN 40432


PG
DIN 40430



Aceros 400 - 800 N/mm²

Aciers / Steel F

Aplicaciones / Applications



Ø x P	Nº	€	L mm	I mm	∇ mm
Pg.7 (12,50 x 20h)	1		70	22	7,00
Pg.9 (15,20 x 18h)	1		70	22	9,00
Pg.11 (18,60 x 18h)	1		80	22	11,00
Pg.13,5 (20,40 x 18h)	1		80	22	12,00
Pg.16 (22,50 x 18h)	1		80	22	14,50

Ø x P	Nº	€	L mm	I mm	∇ mm
Pg.21 (28,30 x 16h)	1		90	22	18,00
Pg.29 (37,00 x 16h)	1		100	25	22,00
Pg.36 (47,00 x 16h)	1		140	40	29,00
Pg.42 (54,00 x 16h)	1		140	40	32,00
Pg.48 (59,30 x 16h)	1		160	40	35,00

2313 HSS


NPT
ANSI/ASME
B1.20.1



Aceros 400 - 800 N/mm²

Aciers / Steel F

Aplicaciones / Applications



Ø x P	Nº	€	L mm	I mm	∇ mm
1/16 - 27h	1		65	19	5,50
1/8 - 27h	1		65	19	5,50
1/4 - 18h	1		70	25	9,00
3/8 - 18h	1		75	25	9,00
1/2 - 14h	1		80	31	12,00

Ø x P	Nº	€	L mm	I mm	∇ mm
3/4 - 14h	1		100	33	16,00
1" - 11,5h	1		110	38	20,00
1"1/4 - 11,5h	1		125	41	24,00
1"1/2 - 11,5h	1		140	42	29,00
2" - 11,5h	1		160	44	29,00

MACHOS DE MANO

TARAUDS À MAIN / HAND TAPS

2318

HSS




NPTF
ANSI/ASME
B1.20.1



Aceros 400 - 800 N/mm²

Aciers / Steel F

Aplicaciones / Applications

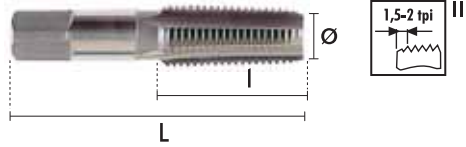

Ø x P	Nº	€	L mm	I mm	mm
1/8 - 27h	1		65	19	5,50
1/4 - 18h	1		70	25	9,00
3/8 - 18h	1		75	26	9,00

Ø x P	Nº	€	L mm	I mm	mm
1/2 - 14h	1		80	31	12,00
3/4 - 14h	1		100	31	16,00

2319

HSS




NPS
ANSI/ASME
B1.20.1



Aceros 400 - 800 N/mm²

Aciers / Steel F

Aplicaciones / Applications

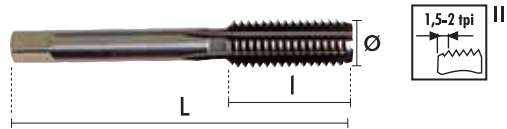

Ø x P	Nº	€	L mm	I mm	mm
1/8 - 27h	1		55	19	6,00
1/4 - 18h	1		62	28	9,00
3/8 - 18h	1		65	28	11,00

Ø x P	Nº	€	L mm	I mm	mm
1/2 - 14h	1		80	35	14,00
3/4 - 14h	1		85	35	17,00
"1" - 11,5h	1		95	45	21,00

2320

HSS



NPSF
ANSI/ASME
B1.20.1



Aceros 400 - 800 N/mm²

Aciers / Steel F

Aplicaciones / Applications



Ø x P	Nº	€	L mm	I mm	mm
1/8 - 27h	1		55	19	6,00
1/4 - 18h	1		62	28	9,00
3/8 - 18h	1		65	28	11,00

Ø x P	Nº	€	L mm	I mm	mm
1/2 - 14h	1		80	35	14,00
3/4 - 14h	1		95	35	17,00